


1550CB2 FLANGED ENDS 1552CB2 BUTT-WELD ENDS GATE CLASS 150 2"-12"

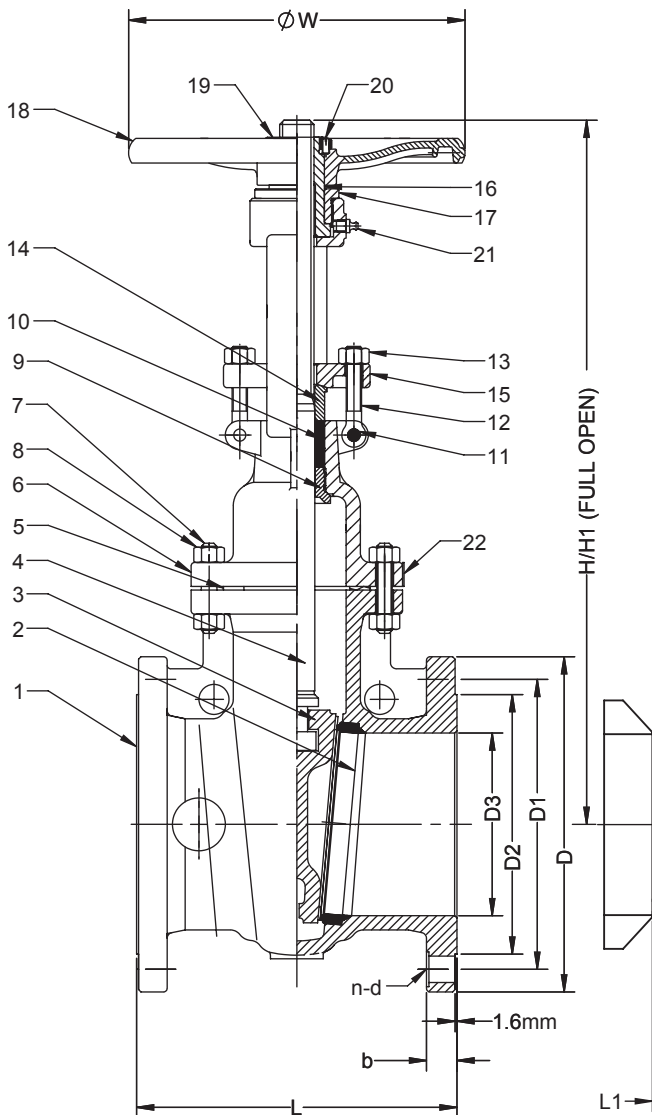

SPECIFICATIONS		
DESIGN: API 600 12th Edition, ASME B 16.34		
PRESSURE-TEMP RATINGS: ASME B 16.34		
CONNECTIONS: ASME B 16.5, B 16.25		
FACE TO FACE : ASME B 16.10		
TEST & INSPECTION: API 598 RP 591		
MATERIAL LIST		
ITEM	PART NAME	MATERIAL
1	BODY	ASTM A216 WCB
2	SEAT RING	A105+Co-Cr-W
3	WEDGE	ASTM A216 WCB+13Cr HF
4	STEM	ASTM A182 F6a
5	GASKET	GRAPHITE+SS CORE
6	BONNET	ASTM A216 WCB
7	STUD BODY/BONNET	A193 B7
8	NUT BODY/BONNET	A194 2H
9	BACKSEAT BUSHING	A276 TYPE 420
10	PACKING	GRAPHITE
11	GLAND EYEBOLT PIN	CARBON STEEL
12	GLAND EYEBOLT	CARBON STEEL
13	GLAND EYEBOLT NUT	CARBON STEEL
14	GLAND	A276 420
15	GLAND FLANGE	ASTM A216 WCB
16	YOKE BUSHING NUT	A439 TYPE D2
17	YOKE BUSHING	CARBON STEEL
18	HANDWHEEL	ASTM A536
19	HANDWHEEL NUT	CARBON STEEL
20	SET SCREW	CARBON STEEL
21	GREASE FITTING	BRASS
22	NAMEPLATE	304 SS

SIZE		L FACE TO FACE	L1 BUTT WELD	D DIA	D1 BOLT CIRCLE	D2 RAISED FACE DIA	D3 DIA	b THICKNESS	n NUMBER OF HOLES	d HOLE DIA	H CLOSED	H1 FULL OPEN	W HANDWHEEL	C _v
2"	IN	7.00	8.50	5.98	4.75	3.62	2.00	0.62	4	0.75	13.66	16.26	7.87	310
	MM	178	216	152	121	92	51	16		19	347	413	200	
2 1/2"	IN	7.50	9.49	7.01	5.50	4.13	2.50	0.69	4	0.75	14.92	18.03	7.87	480
	MM	191	241	178	140	105	64	18		19	379	458	200	
3"	IN	7.99	11.10	7.48	6.00	5.00	2.99	0.75	4	0.75	14.96	18.62	9.84	710
	MM	203	282	191	152	127	76	19		19	380	473	250	
4"	IN	9.00	12.01	9.02	7.50	6.18	4.02	0.94	8	0.75	17.17	21.73	9.84	1300
	MM	229	305	229	191	157	102	24		19	436	552	250	
5"	IN	10.00	15.00	10.00	8.50	7.32	5.00	0.94	8	0.87	20.75	26.30	11.81	1950
	MM	254	381	254	216	186	127	24		22	527	668	300	
6"	IN	10.50	15.87	10.98	9.50	8.50	5.98	1.00	8	0.87	23.19	29.49	11.81	3100
	MM	267	403	279	241	216	152	25		22	589	749	300	
8"	IN	11.50	16.50	13.50	11.75	10.63	7.99	1.12	8	0.87	28.70	37.52	14.17	5720
	MM	292	419	343	299	270	203	29		22	729	953	360	
10"	IN	13.00	17.99	15.98	14.25	12.76	10.00	1.19	12	0.98	34.69	45.43	15.75	8940
	MM	330	457	406	362	324	254	30		25	881	1154	400	
12"	IN	14.00	19.76	19.02	17.00	15.00	12.01	1.25	12	0.98	40.20	52.95	17.72	13350
	MM	356	502	483	432	381	305	32		25	1021	1345	450	

The information presented on this sheet is correct at time of publication. Milwaukee/Hammond Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com or www.hammondvalve.com.
 ⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.

